




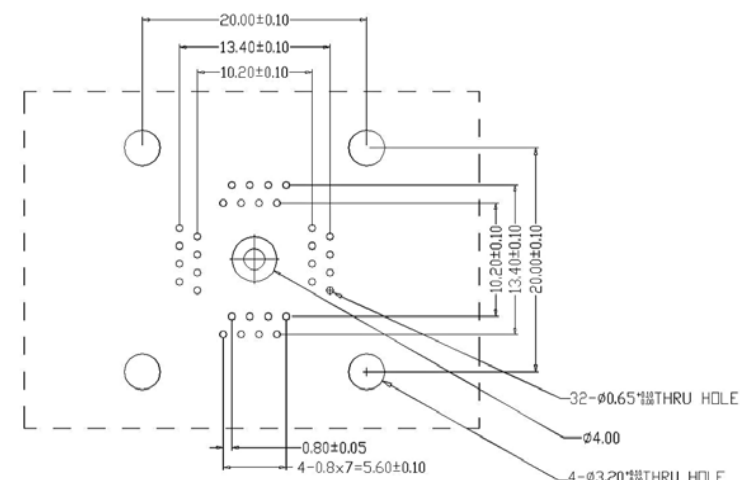



PCB PATTERN (Top View)

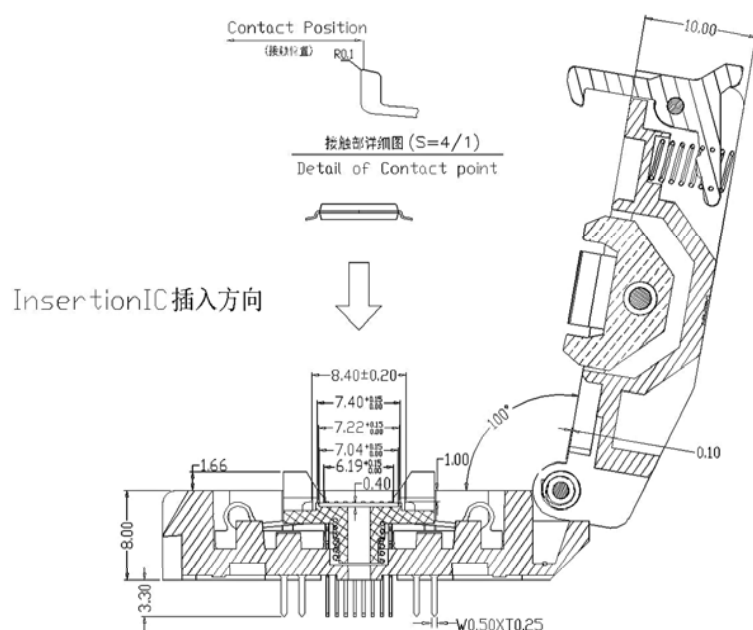

SEC.A-A S=2/1

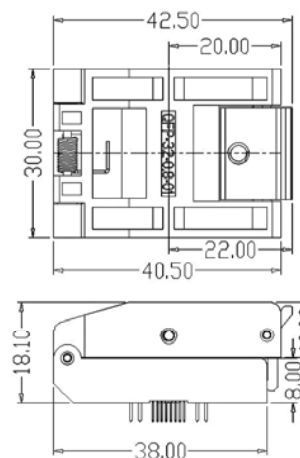

外形参考图
DIMENSIONS



APPL ICABLE IC S=2/1

1. MATERIAL AND FINISH

1. SOCKET LID: PEI
2. SOCKET BASE: PEI
3. CONTACTS: BeCu, SELECTIVE Au-Au FLASH OVER NI PLATING
4. SPRINGS: STAINLESS STEEL, PASSIVATED

2. SPECIFICATION

1. INSULATION RESISTANCE : 1000Mohm or more at 100VDC.
2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC for one minute.
3. CONTACT RESISTANCE: 30mohm or less at 10mA,20mV or less.
4. OPERATION TEMPERATURE : -55°C~+170°C
5. CONTACT FORCE: 150~180g with contact travel distance between 0.2mm~0.9mm.

△ C			DWG NO		PART NAME	QFP-32-0.8-01	
△ B			MATERIAL	SCALE	1:1	TITLE	
△ A			QTY	1	UNIT	mm	
REV	DESCRIPTION	DATE	CHECK	SHEET	1 OF 1	REV	
						01	
APPLICATION				APPROVE	DATE		
ANGLES	FINISH	THROUGH HOLE	ME TRIC	0.X'±0.1	CHECK		DATE
ALL UN-SPECIFIED CHAMFERS-0.2				0.XX'±0.05	DEGK		DATE
							20140512

JRS