

A

B







D

A

B

C

D

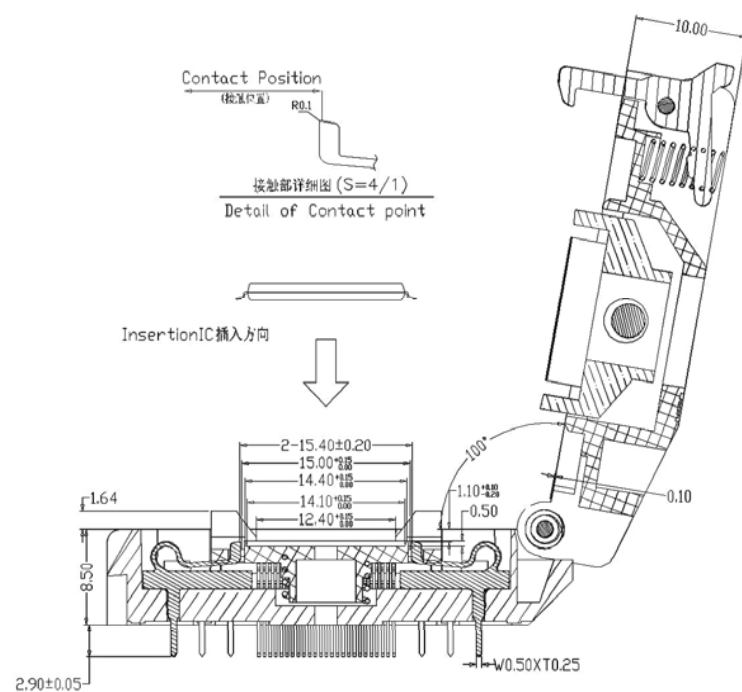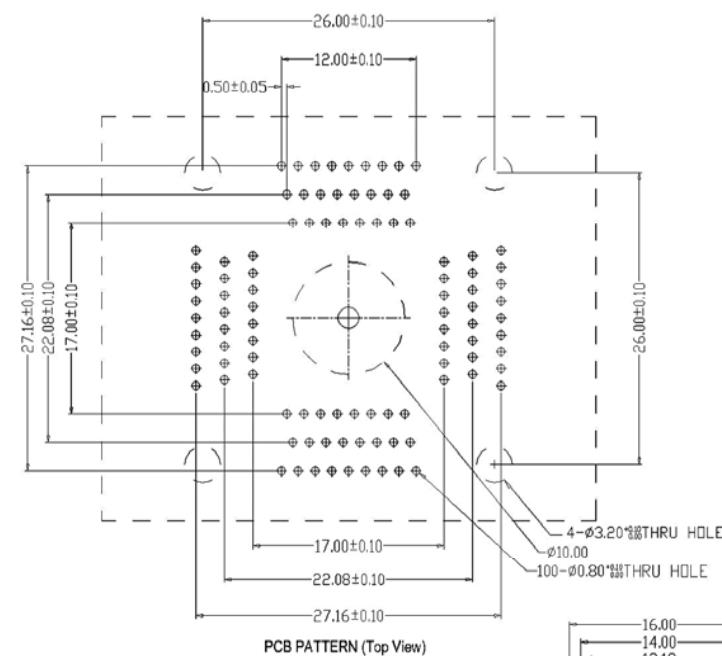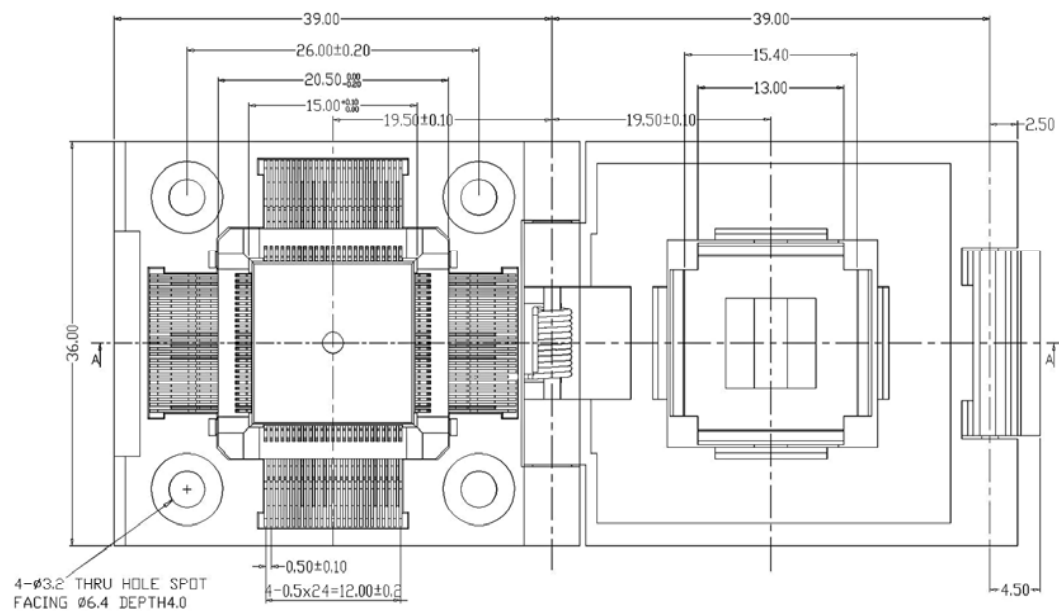

外形参考图
DIMENSIONS

SEC.A-A

$$S=2/1$$

1. MATERIAL AND FINISH

1. SOCKET LID :PEI
2. SOCKET BASE :PEI
3. CONTACTS :BeCu,SELECTIVE Au-AuFLASH OVER NI PLATING
4. SPRINGS :STAINLESS STEEL ,PASSIVATED

2. SPECIFICATION

1. INSULATION RESISTANCE : 1000Mohm or more at 100VDC.
2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC for one minute.
3. CONTACT RESISTANCE: 30mohm or less at 10mA,20mV or less.
4. OPERATION TEMPERATURE : -55°C~+170°C
5. CONTACT FORCE: 15g-180g with contact travel distance between 0.2mm-0.9mm.

$\triangle C$				DWG NO		PART NAME	QFP-100-0.5-01	
$\triangle B$				MATERIAL	SCALE	1:1	TITLE	
$\triangle A$				QTY	1	UNIT	mm	
REV	DESCRIPTION	DATE	CHECK	SHEET	1 OF 1	REV	01	
APPLICATION				APPROVE				
ANGLE	HINGE	ROUGH EXCEL	ME	0.X $\pm$ 0.1	CHECK			DATE
			TRIG	0.XX $\pm$ 0.05	DEGK			DATE
ALL UN-SPECIFIED CHAMFERS: 0.2								20140512

JRS